 HannStar Display Corp.			
Document Title	HSD088IPW1-A Preliminary Specification	Page No.	1/25
Document No.	DC120-	Revision	1.0

TO :

Date : Aug., 24, 2015

# **HannStar Product Specification** **(Preliminary Specification)**

**Model: HSD088IPW1-A\***

**Note:**

1. The information contained herein is preliminary and may be changed without prior notices.
2. Please contact HannStar Display Corp. before designing your product based on this module specification.
3. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.
4. The mark “\*\*” of Model means sub-model code.



HannStar Display Corp.

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	2/25
Document No.	DC120-	Revision	1.0

### Record of Revisions

Rev.	Date	Sub-Model	Description of change
1.0	Aug, 14, 2015	-A	Preliminary Product Specification was first released.
1.1	Sep, 07, 2015	-A	P10 Modify Pixel Format



Document Title	HSD088IPW1-A Preliminary Specification	Page No.	3/25
Document No.	DC120-	Revision	1.0

## Contents

1.0	General description .....	p.4
2.0	Absolute maximum ratings.....	p.5
3.0	Optical characteristics.....	p.6
4.0	Block diagram .....	p.10
5.0	Interface pin connection .....	p.13
6.0	Electrical characteristics .....	p.16
7.0	Reliability test items .....	p.21
8.0	Outline dimension .....	p.22
9.0	Lot mark .....	p.24
10.0	Package specification .....	p.25
11.0	General precaution .....	p.26

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	4/25
Document No.	DC120-	Revision	1.0

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

HannStar Display model HSD088IPW1-A is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 8.8 (1:4) inch diagonally measured active display area with (480 horizontal by 1920 vertical pixel) resolution.

### 1.2 Features

- 8.8 inch (1:4 diagonal) configuration
- 16.7M color
- RoHS/ Halogen Free Compliance

### 1.3 Applications

- Automotive

### 1.4 TFT LCD General information

Item	Specification	Unit	
Outline Dimension	64.3 x 231.3 (typ)	mm	
Display area	54.72(H) x 218.88(V)	mm	
Number of Pixel	480 RGB (H) x 1920(V)	pixels	
Pixel pitch	0.114(H) x 0.114(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display mode	Normally Black		
NTSC	50 (typ.)	%	
Surface treatment	HC		
Weight	(110)g (Typ.)	g	
Back-light	White LED		
Power Consumption	Logic	0.65 (Max) @ White pattern · Frame rate 60Hz	W
	BL System	2.8 (Max) @ Black pattern w/o LED driver	W

### 1.5 Mechanical Information

Item	Min.	Typ.	Max.	Unit	
Module Size	Horizontal (H)	64.0	64.3	64.6	mm
	Vertical (V)	231.0	231.3	231.6	mm
	Depth (D)	—	4.8	5.1	mm
Weight	—	(110)	—	g	

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	5/25
Document No.	DC120-	Revision	1.0

## 2.0 ABSOLUTE MAXIMUM RATINGS

### 2.1 Electrical Absolute Rating

#### 2.1.1 TFT LCD Module

Item	Symbol	Min.	Max.	Unit	Note
Power supply voltage	$V_{DD}$	-0.5	4.0	V	
	$V_{GH}$	15	26	V	
	$V_{GL}$	-11.5	-4	V	
	$AV_{DD}$	7	12.5	V	
Logic Signal Input Level	$V_{DD}$	-0.5	4.0	V	

#### 2.1.2 Backlight unit

Item	Symbol	Typ.	Max.	Unit	Note
LED current	$I_L$	160	-	mA	(1) (2)(3)
LED voltage	$V_L$	17	20.4	V	(1) (2)(3)
LED reverse voltage	$V_R$	--	5	V	
LED forward current	$I_F$		20	mA	

Note:

- (1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under normal operating conditions.
- (2)  $T_a = 25 \pm 2^\circ\text{C}$
- (3) Test Condition: LED current 140 mA. The LED lifetime could be decreased if operating  $I_L$  is larger than 140mA.

#### 2.1.3 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	$T_{opa}$	-20	70	$^\circ\text{C}$	
Storage Temperature	$T_{stg}$	-30	80	$^\circ\text{C}$	

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	6/25
Document No.	DC120-	Revision	1.0

### 3.0 OPTICAL CHARACTERISTICS

#### 3.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast		CR	$\Theta=0$ Normal viewing angle	600	800	—		(1)(2)(4)
Response time		Tr		—	40	-	msec	(1)(3)
White luminance (Center)		$Y_L$		480	600	—	cd/m <sup>2</sup>	(1)(4) ( $I_L=160mA$ )
Color chromaticity (CIE1931)	Red	$R_x$						c-light
		$R_y$						
	Green	$G_x$						
		$G_y$						
	Blue	$B_x$						
		$B_y$						
White	$W_x$	0.263	0.313	0.363				
	$W_y$	0.279	0.329	0.379				
Viewing angle	Hor.	$\Theta_L$	CR>10	75	85	—	(1)(4)	
		$\Theta_R$		75	85	—		
	Ver.	$\Theta_U$		75	85	—		
		$\Theta_D$		75	85	—		
Brightness uniformity		$B_{UNI}$	$\Theta=0$ (9point)	70	80	—		(5)
View Direction		ALL						(6)

#### 3.2 Measuring Condition


- Measuring surrounding : dark room
- LED current  $I_L$ : 160mA
- Ambient temperature :  $25\pm 2^\circ C$
- 15min. warm-up time.

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	7/25
Document No.	DC120-	Revision	1.0

### 3.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 20 ~ 21 mm

**Note (1)** Definition of Viewing Angle:

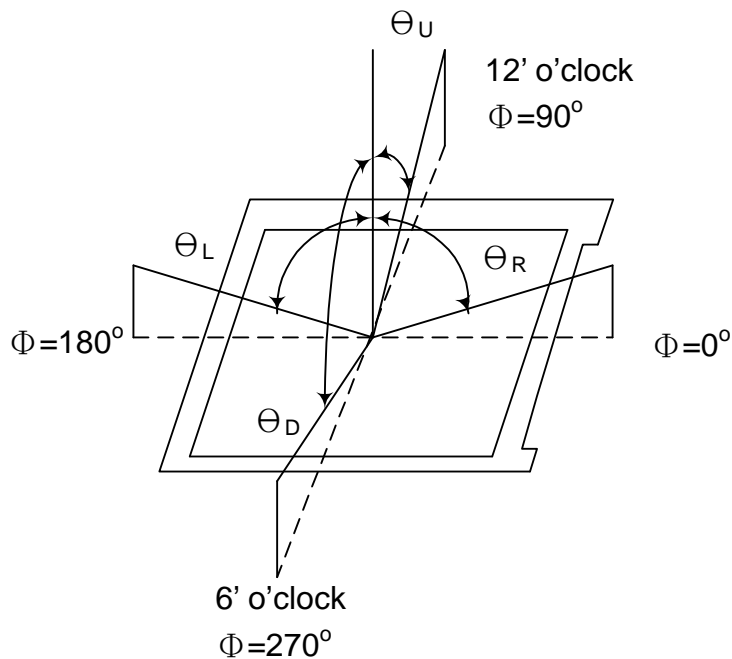


**Note (2)** Definition of Contrast Ratio (CR) :  
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	8/25
Document No.	DC120-	Revision	1.0

**Note (3)** Definition of Response Time : Sum of  $T_R$  and  $T_F$

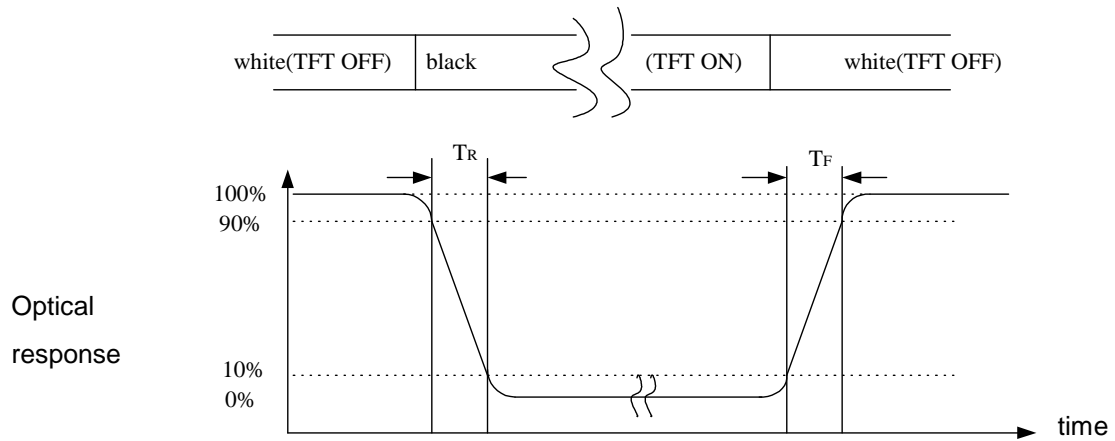


**Note (4)** Definition of optical measurement setup

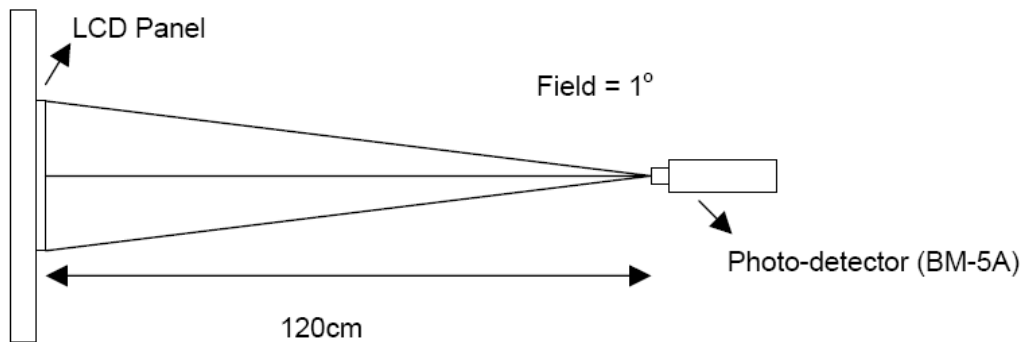



Document Title	HSD088IPW1-A Preliminary Specification	Page No.	9/25
Document No.	DC120-	Revision	1.0

**Note (5)** Definition of Average Luminance Uniformity of White (Center)  
 Definition of brightness uniformity

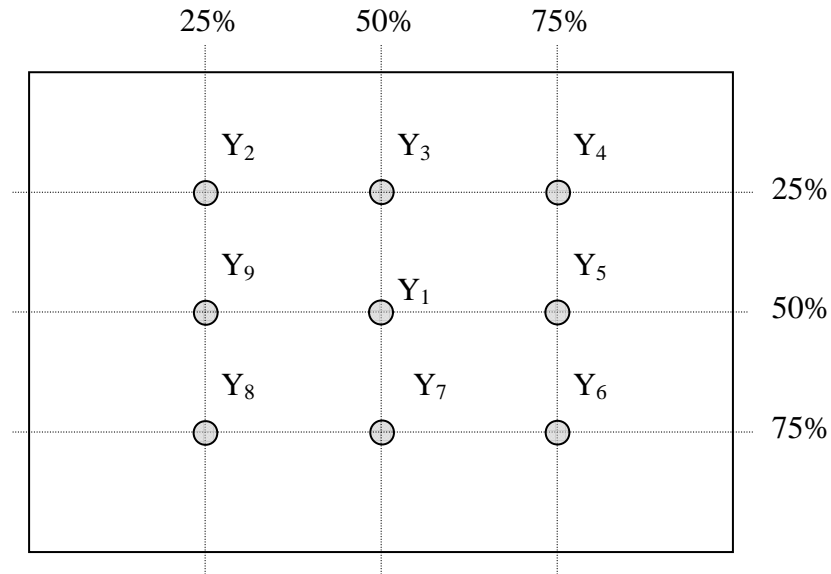


$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$

**Note (6)** Rubbing Direction (The different Rubbing Direction will cause the different optimal view direction.)

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	10/25
Document No.	DC120-	Revision	1.0


### 4.0 BLOCK DIAGRAM

#### 4.1 TFT LCD Module

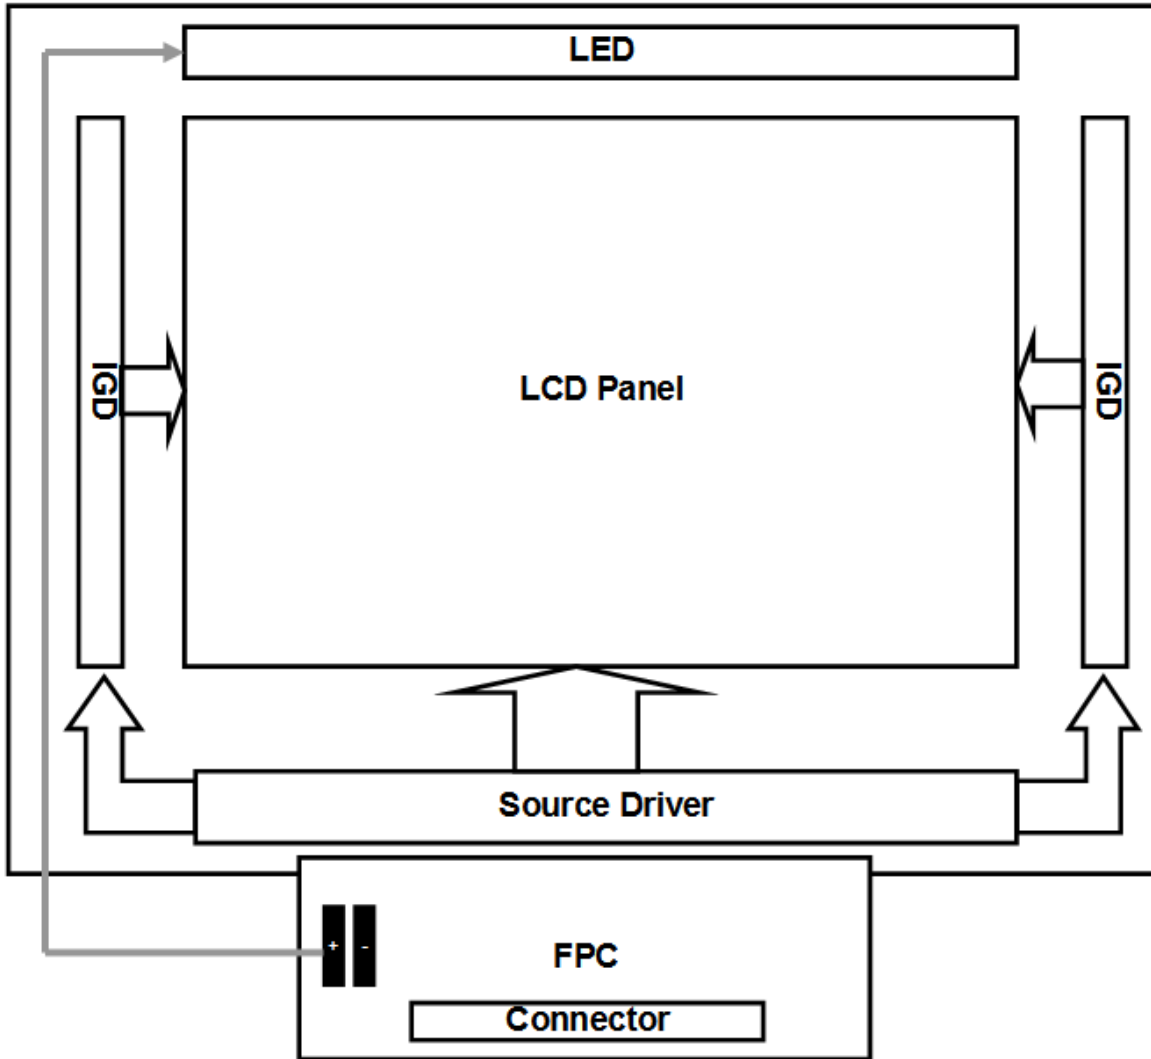

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	11/25
Document No.	DC120-	Revision	1.0

### 4.2 Pixel Format

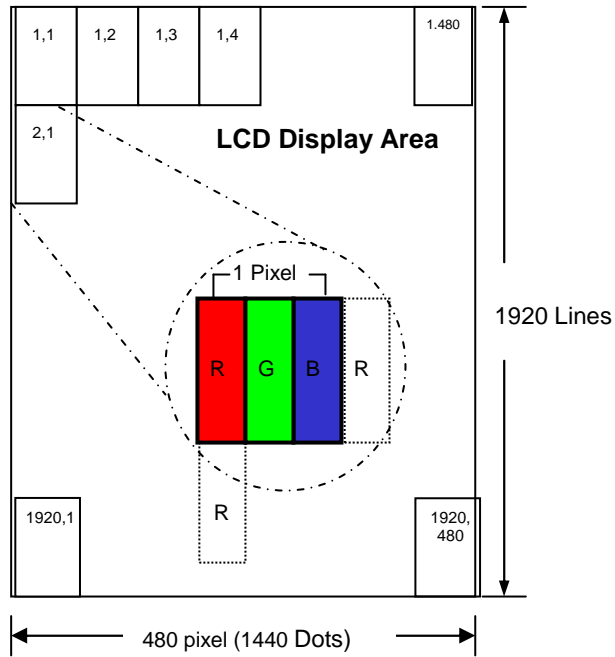

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	12/25
Document No.	DC120-	Revision	1.0

### 5.0 INTERFACE PIN CONNECTION

FPC connector is used for electronics interface. The recommended model is Hirose FH34SRJ-40S-0.5SH(50)

Pin No.	Symbol	I/O	Function
1	GND	P	Ground
2	NC	---	No connection
3	LED+	P	LED Anode
4	LED+	P	LED Anode
5	NC	---	No connection
6	LED-	P	LED Cathode
7	LED-	P	LED Cathode
8	NC	---	No connection
9	GND	P	Ground
10	NC	---	No connection
11	AVDD	P	Power supply for analog circuit
12	NC	---	No connection
13	VGH	P	Power supply for analog circuit
14	NC	---	No connection
15	VGL	P	Power supply for analog circuit
16	NC	---	No connection
17	GND	P	Ground
18	VCOM	P	Power supply for common voltage
19	GND	P	Ground
20	GND	P	Ground
21	RESET	I	Global reset
22	VDD	P	Power supply for digital circuits
23	STBYB	I	Standby mode
24	TP_Sync	O	Sync signal for touch panel
25	GND	P	Ground
26	D0P	I	MIPI Data Input Lane0 positive-end
27	D0N	I	MIPI Data Input Lane0 negative-end
28	GND	P	Ground
29	D1P	I	MIPI Data Input Lane1 positive-end
30	D1N	I	MIPI Data Input Lane1 negative-end
31	GND	P	Ground
32	CLKP	I	MIPI Clock Input positive-end
33	CLKN	I	MIPI Clock Input negative-end
34	GND	P	Ground
35	D2P	I	MIPI Data Input Lane2 positive-end
36	D2N	I	MIPI Data Input Lane2 negative-end
37	GND	P	Ground

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	13/25
Document No.	DC120-	Revision	1.0

38	D3P	I	MIPI Data Input Lane3 positive-end
39	D3N	I	MIPI Data Input Lane3 negtive-end
40	GND	P	Ground

## 6.0 ELECTRICAL CHARACTERISTICS

### 6.1 TFT LCD Module

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	VDD	3.0	3.3	3.6	V	
	VGH	17.0	18.0	19.0	V	
	VGL	-11	-10	-9	V	
	AVDD	11.8	12	12.2	V	
VCOM	VCOM	3.66	4.16	4.66	V	Note (1)
Input signal voltage	ViH	0.7 VDD	-	VDD	V	Note (2)
	ViL	0	-	0.3 VDD	V	
Current of power supply	IDD	-	35	-	mA	VDD =3.3V
	IADD	-	30	-	mA	AVDD=12V
	IGH	-	5	-	mA	VGH=18V
	IGL	-	-5	-	mA	VGL= -10V
	Ivcom	-	0.1	--	mA	Vcom= 4.16 V

Note (1): Please adjust VCOM to make the flicker level minimum.

Note (2) :RESET 、STBYB

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	14/25
Document No.	DC120-	Revision	1.0

## 6.2 MIPI DC Characteristics

### 6.2.1 HS Receiver DC Specification

Parameter	Symbol	Rating			Unit	Note
		Min	Typ	Max		
Operation Voltage	VDD	1.5-10%	1.5	1.5+10%	mV	
Differential Input Voltage	VID	70	200	260	mV	
Common Mode Voltage	V <sub>CMRX(DC)</sub>	70	-	330	mV	
Differential Input High Threshold Voltage	VTH	-	-	70	mV	
Differential Input Low Threshold Voltage	VTL	-70	-	-	mV	
Singled-ended input high voltage	V <sub>IHHS</sub>	-	-	460	mV	
Singled-ended input low voltage	V <sub>ILHS</sub>	-40	-	-	mV	
Singled-ended threshold for HS termination enable	V <sub>TERM-EN</sub>	-	-	450	mV	
Differential input impedance	Z <sub>ID</sub>	80	100	125	ohm	
Pin leakage current	I <sub>LEAK</sub>	-10	-	10	uA	
Common-mode interference beyond 450MHz	ΔV <sub>CMRX(HF)</sub>	-	-	100	mV	
Common-mode interference 50MHz - 450MHz	ΔV <sub>CMRX(LF)</sub>	-50	-	50	mV	
Common-mode termination	C <sub>CM</sub>	-	-	60	pF	
Embedded Termination	R <sub>T</sub>	90	100	110	ohm	2bits RT_SEL[1: 0] for termination resistor selection 00 → 200ohm 10, 01 → 150ohm 11 → 100ohm (default)  1bit ERMEN for termination resistor enable TERMEN=0, termr disable R=(OPEN) TERMEN=1, termr enable


Note:

- (1) Excluding possible additional RF interference of 100mV peak sine wave beyond 450MHz.
- (2) This table value includes a ground difference of 50mV between the transmitter and the receiver, the static common-mode level tolerance and variations below 450MHz.

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	15/25
Document No.	DC120-	Revision	1.0


### 6.2.2 LP Receiver DC Specification

Parameter	Symbol	Rating			Unit	Note
		Rating				
		Min	Typ	Max		
Logic 1 input voltage	$V_{IH}$	880	-	-	mV	
Logic 0 input voltage, not in ULP State	$V_{IL}$	-	-	550	mV	
Input hysteresis	$V_{HYST}$	25	-	-	mV	

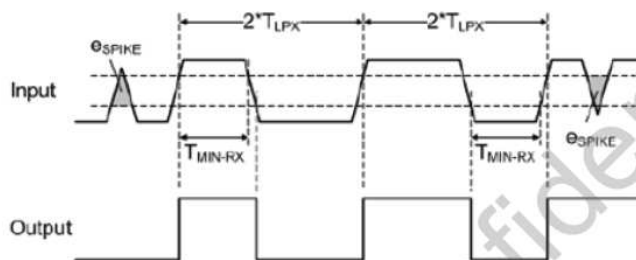

### 6.2.3 Line Contention Detection

Parameter	Symbol	Rating			Unit	Note
		Min	Typ	Max		
Logic 1 contention threshold	$V_{IHCD}$	450	-	-	mV	
Logic 0 contention threshold	$V_{ILCD}$	-	-	200	mV	

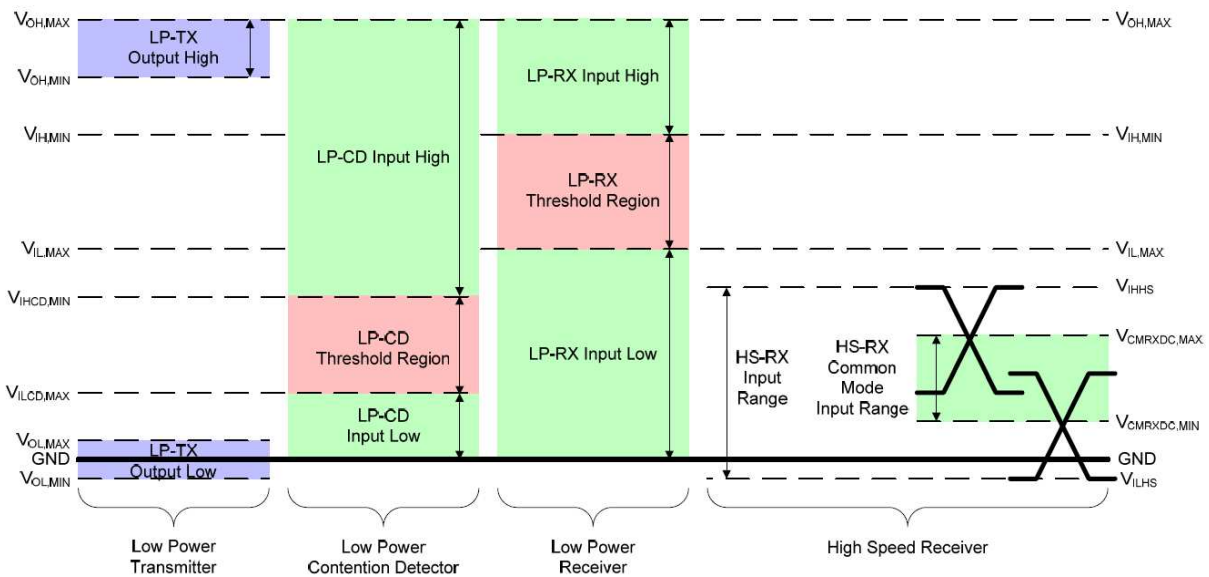

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	16/25
Document No.	DC120-	Revision	1.0

### 6.3 Interface Timing


Item	Symbol	Min.	Typ.	Max.	Unit
MIPI Video data rate(4 lane)	-	-	397.7	-	Mbps
PCLK Frequency	FPCLK	-	66.3	-	MHz
Horizontal Synchronization	Hsync	-	30	-	PCLK
Horizontal Back Porch	HBP	-	30	-	PCLK
Horizontal Front Porch	HFP	-	30	-	PCLK
Hsync+HBP+HFP	-	75	90	-	PCLK
HorizontalAddress(Display Area)	Hadr	-	480	-	PCLK
Horizontal cycle	-	555	570	-	PCLK
Vertical Synchronization	Vsync	-	6	-	Line
Vertical Back Porch	VBP	-	6	-	Line
Vertical Front Porch	VFP	-	6	-	Line
Vsync+VBP+VFP	-	15	18	-	Line
Vertical Address(Display Area)	Vadr	-	1920	-	Line
Vertical cycle	-	1935	1938	-	Line
Frame Rate	-	-	60	-	Hz



Document Title	HSD088IPW1-A Preliminary Specification	Page No.	17/25
Document No.	DC120-	Revision	1.0

### 6.4 Power On / Off Sequence

Power-On/Off Timing Sequence:

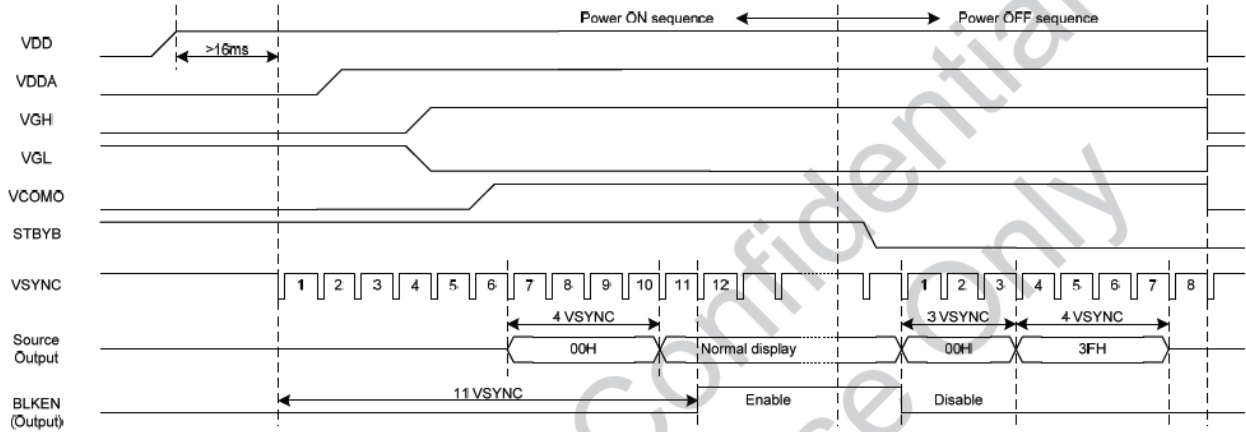

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	18/25
Document No.	DC120-	Revision	1.0

### 6.5 Backlight Unit

Parameter	Symbol	Min	Typ	Max	Units	Condition
LED Current	$I_F$	--	160	--	mA	$T_a=25^{\circ}\text{C}$
LED Voltage	$V_F$	2.95	--	3.55	Volt	$T_a=25^{\circ}\text{C}$
LED Life-Time	N/A	--	30,000	--	Hour	$T_a=25^{\circ}\text{C}$ $I_F=20\text{mA}$ Note (2)

Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition:  $T_a=25\pm 3^{\circ}\text{C}$ , typical IL value indicated in the above table until the brightness becomes less than 50%.

Note (2) The "LED life time" is defined as the module brightness decrease to 50% original brightness at  $T_a=25^{\circ}\text{C}$  and  $I_L=140\text{mA}$ . The LED lifetime could be decreased if operating  $I_L$  is larger than 140mA. The constant current driving method is suggested.

Note (3) LED Light Bar Circuit


Document Title	HSD088IPW1-A Preliminary Specification	Page No.	19/25
Document No.	DC120-	Revision	1.0

### 7.0 Reliability test items

No.	Item	Conditions	Remark
1	High Temperature Storage	Ta=+80°C, 240hrs	
2	Low Temperature Storage	Ta=-30°C, 240hrs	
3	High Temperature Operation	Ta=+70°C, 240hrs	
4	Low Temperature Operation	Ta=-20°C, 240hrs	
5	Thermal Cycling Test (non operation)	-20°C(30min)→+70°C(30min), 100 cycles	
6	Vibration	Sine Wave 1.5G, 5~500Hz, XYZ 30min/each direction	
7	Shock	Half-Sine, 200G, 2ms, ±XYZ, 1time	

Note: There is no display function NG issue occurred, all the cosmetic specification is judged before the reliability stress.

#### Storage / Operating temperature

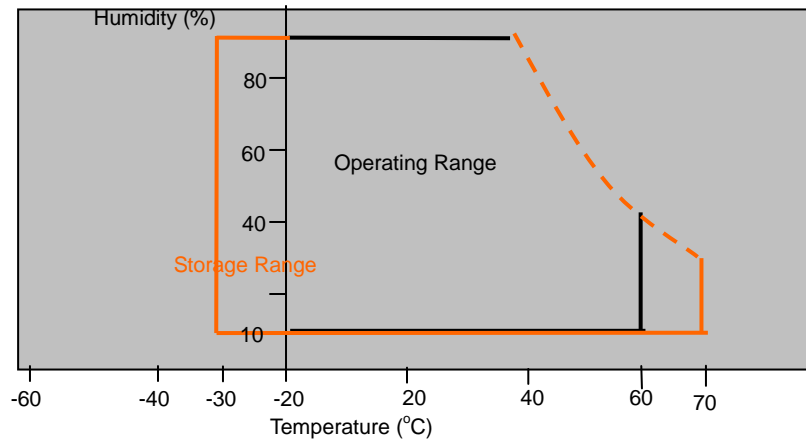


**Note** .Max wet bulb temp.=39°C

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	20/25
Document No.	DC120-	Revision	1.0



## 8.0 OUTLINE DIMENSION

### 8.1 Front View Outline Dimension

Unit : mm

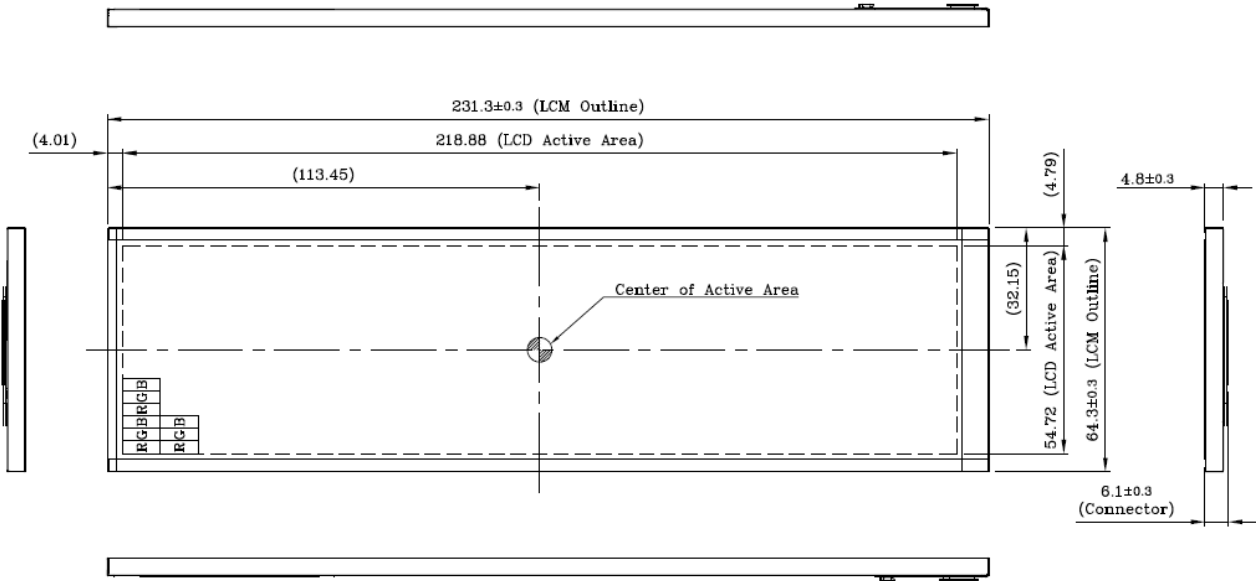

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	21/25
Document No.	DC120-	Revision	1.0

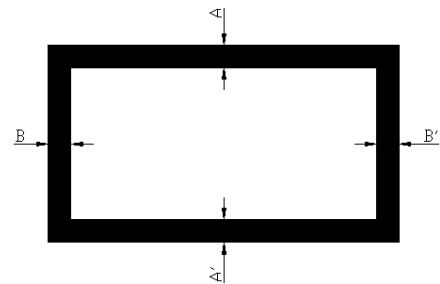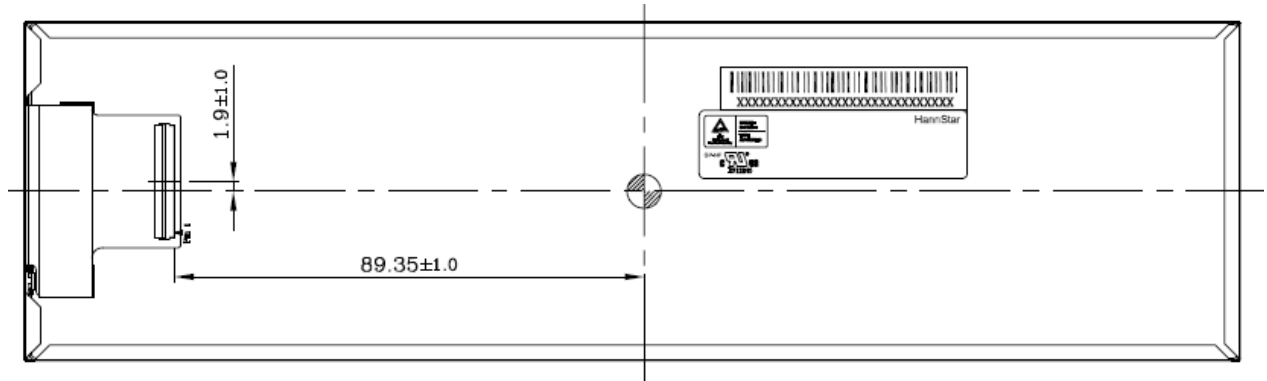

Note:  
General Tolerance  $\pm 0.3\text{mm}$

BM Assembly Tolerance

$$| A - A' | \leq 1 \text{ (mm)}$$

$$| B - B' | \leq 1 \text{ (mm)}$$

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	22/25
Document No.	DC120-	Revision	1.0

## 9 LOT MARK

### 9.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

Code 1,2,3,4,5,6: HannStar internal flow control code.

Code 7: production location.

Code 8: production year.

Code 9: production month.

Code 10,11,12,13,14,15: serial number.

#### Note (1) Production Year

Year	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Mark	6	7	8	9	0	1	2	3	4	5

#### Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

### 9.2 Location of Lot Mark

- (1) Location: The lot mark is attached to the back side of the LCD module. See Product back view. ( Section 8.0 : OUTLINE DIMENSION )
- (2) Detail of the Lot mark: Print 15 code as lot mark (see 9.1 Lot Mark)
- (3) This is subject to change without prior notice.




Document Title	HSD088IPW1-A Preliminary Specification	Page No.	23/25
Document No.	DC120-	Revision	1.0

## 10.0 PACKAGE SPECIFICATION

### 10.1 Packing form

LCM Model	LCM Qty. in the Box	Inner Box Size(mm)	Notice
HSD088IPW1-A00	60 pcs/box	477x310x203	

### 10.2 Packing assembly drawings

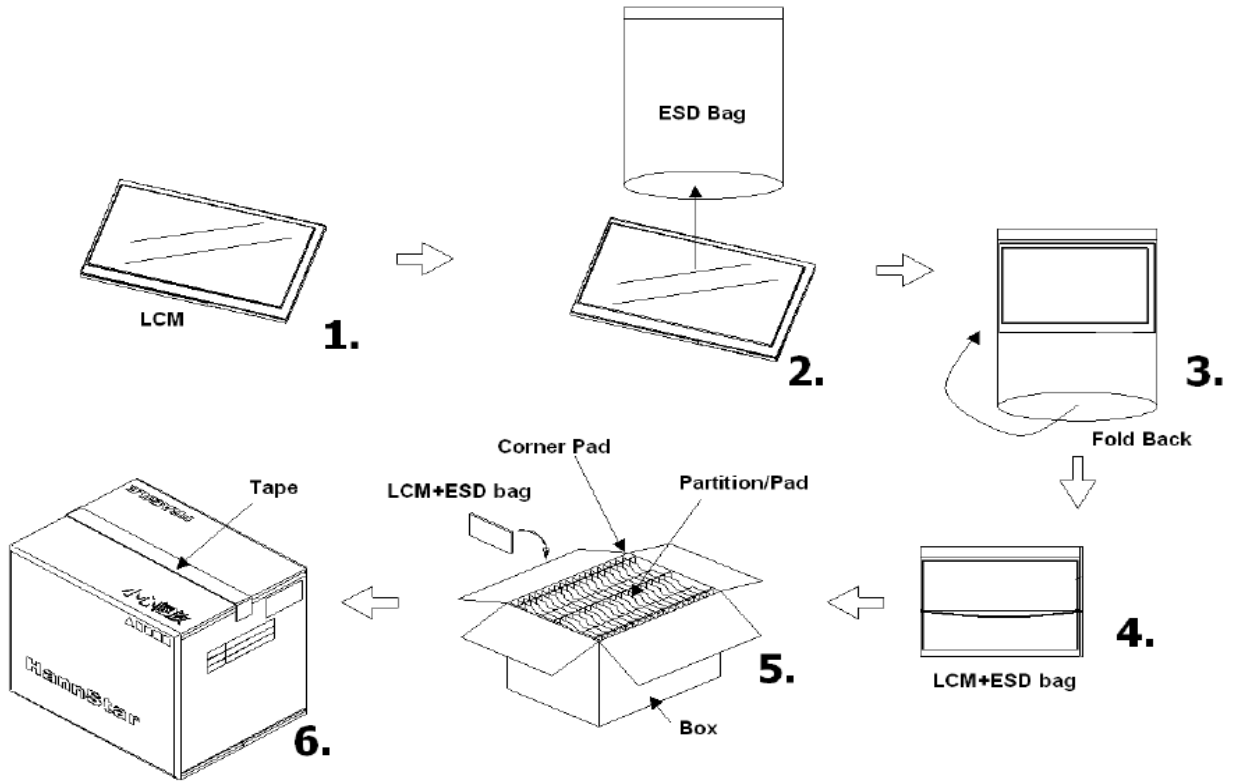

Document Title	HSD088IPW1-A Preliminary Specification	Page No.	24/25
Document No.	DC120-	Revision	1.0

## 11.0 GENERAL PRECAUTION

### 11.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

### 11.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

### 11.3 Breakage of LCD Panel

11.3.1. If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

11.3.2. If liquid crystal contacts mouth or eyes, rinse out with water immediately.

11.3.3. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

11.3.4. Handle carefully with chips of glass that may cause injury, when the glass is broken.

### 11.4 Electric Shock

11.4.1. Disconnect power supply before handling LCD module.

11.4.2. Do not pull or fold the LED cable.

11.4.3. Do not touch the parts inside LCD modules and the fluorescent LED's connector or cables in order to prevent electric shock.

### 11.5 Absolute Maximum Ratings and Power Protection Circuit

11.5.1. Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.

11.5.2. Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

11.5.3. It's recommended to employ protection circuit for power supply.


### 11.6 Operation

11.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.

11.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.

11.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.



 HannStar Display Corp.			
Document Title	HSD088IPW1-A Preliminary Specification	Page No.	25/25
Document No.	DC120-	Revision	1.0

11.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.

11.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

### **11.7 Mechanism**

Please mount LCD module by using mounting holes arranged in four corners tightly.

### **11.8 Static Electricity**

11.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

11.8.2 Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.

### **11.9 Strong Light Exposure**

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

### **11.10 Disposal**

When disposing LCD module, obey the local environmental regulations.